



33 METER Z-FOLD

4 SECTION

BOOM PUMP



JXZ 33-4.16*

BOOM SPECIFICATIONS

Vertical Reach	32.5 m (106'8")
Horizontal Reach	28.5 m (93'6")
Reach from Front - Cabover	26.0 m (85'4")
Unfolding Height	7.6 m (24'11")
1st Section Length	8.0 m (26'3")
2nd Section Length	6.85 m (22'6")
3rd Section Length	6.85 m (22'6")
4th Section Length	6.8 m (22'4")
Outrigger	X-Style
Front Spread	6.3 m (20'8")
Rear Spread	3.9 m (13')

GENERAL SPECIFICATIONS

Pipe Size (ID)	125 mm (5")
Boom Control Valve	Proportional (by HAWE)
Radio Remote:	Dual Wireless Transmitter System
Vibrator	Standard
Water Pump	Hydraulic Power 20 bar (290 psi)
Water Tank	540 L (143 G)
Wear Parts	Carbide
Popular Upgrades†	LED Boom Light Kit LED Outrigger Lights Heated Water Tank Heated Hydraulic Tank Air-Cuff Twin Wall Pipe 18 or 20 cell Pump Kit Big Mouth S-Tube

† more options available, ask your sales rep for details.

PUMP SPECIFICATIONS

Output	Rod Side	164 m ³ /h (215 yd ³ /h)
	Piston Side	102 m ³ /h (133 yd ³ /h)
Pressure	Rod Side	72 bar (1044 psi)
	Piston Side	115 [†] bar (1668 psi)
Concrete Cylinder Diameter	230 mm (9")	
Concrete Cylinder Type	Hard Chromed	
Stroke Length	2100 mm (83")	
S-Tube Size	8" X 7"	
Main Oil Pump	Rexroth Hydromatic A11VSO260	
Hydraulic System Pressure	350 bar (5076 psi)	
Lube System (Hopper)	Automatic	
Switching System	Hydraulic	
Hopper Capacity	Easy Clean 600 L (158 G)	
Number of Strokes/Min	31	
Output Control Range	10(13)~164m ³ /h(215yd ³ /h)	

† Not to be used through boom pipe.

*Contact your sales representative for alternate chassis options.

www.allianceconcretepumps.com

JXZ 33-4.16

BOOM PUMP




1.888.584.7231



1.888.870.0908

CABOVER

Reach from front : 26.0m (85'4")

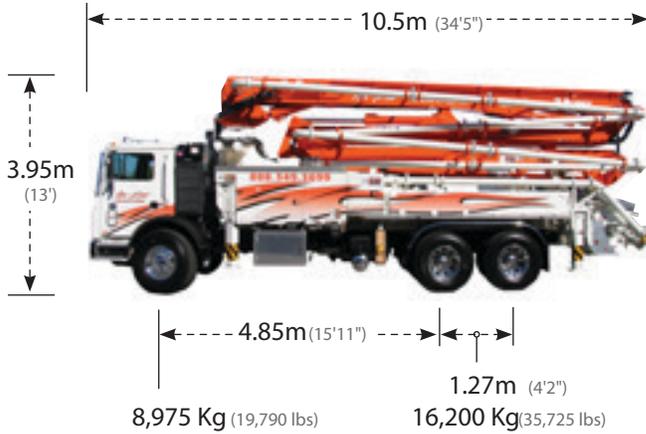

CONVENTIONAL CAB

Reach from front : 25.5m (83'8")



DIAGRAMS

